


Painting assistance for glazing ledges RU-LH

Device to paint the glazing ledges frame together with the sash

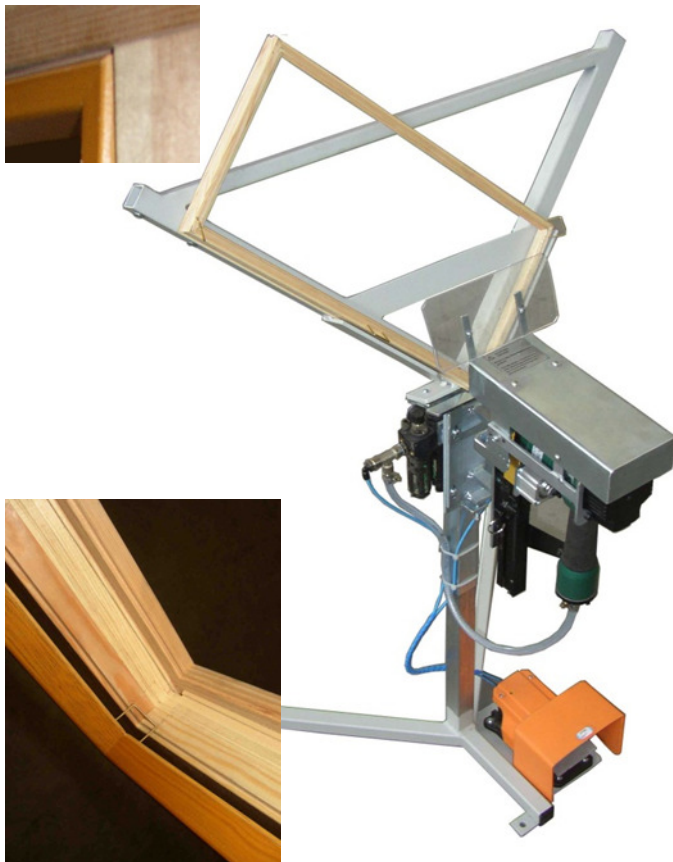

Painting assistance for the simultaneous painting of sash and glazing ledges. A clamp has to be positioned in each corner of the already made frame. The operation is started by using a foot valve. For different thickness of ledges the clamping device is height- and depth adjustable. The positioning is diagonally and the clamps stick out of the wood about 35 mm. Now the frame can be pressed into the sash and is fix positioned. During the painting the frame will be positioned about 20 mm in front of the sash. After drying, the frame is pressed into the sash, it will be removed before the glazing. The clamps can be removed by hand for the further processing. For different thickness of ledges the clamping-device is height- and depth adjustable. The height is adjustable from 700 – 1200 mm.

Advantages

- Quick assembly
- No jamming during painting
- No formation of shades
- No searching for the right frames

Technical Data :

Type Description

RU-LH Painting assistance
1 pack Clamps, 4300 pieces 26 x 50 mm

Order-Nr.

10616002
6678-2